


### 3-Way Brass Diverting Ball Valves - T Flow

Female NPT x Female NPT x Female NPT

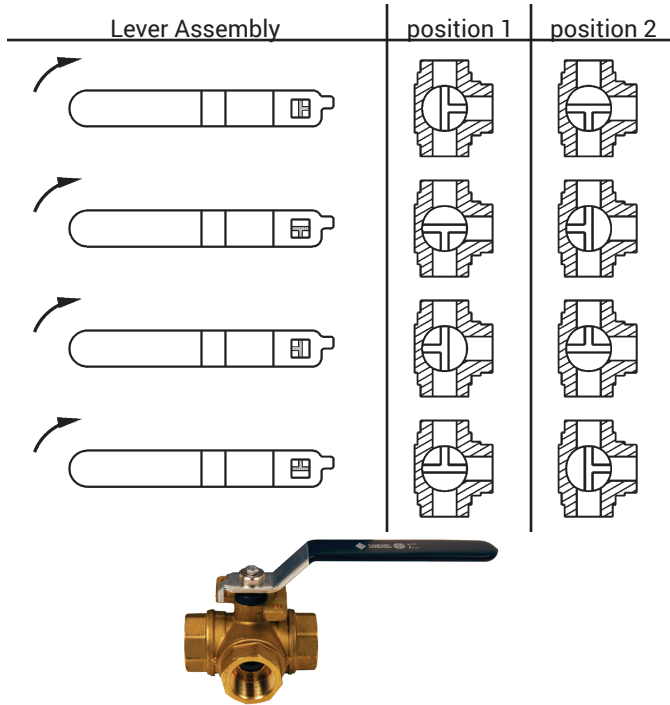

**Features**

- Blow-out proof stem
- Adjustable stem packing

**Materials**

- Chrome plated brass ball
- PTFE seats, seals, and thrust washer

**Specifications**


- Maximum temperature: **366°F (186°C)**
- Pressure rating: **400 PSI WOG; 100 PSI saturated steam**

Size	Port	Brass Part #
1/2"	standard	BBV50DTW
3/4"		BBV75DTW
1"		BBV100DTW
1-1/4"		BBV125DTW
1-1/2"		BBV150DTW
2"		BBV200DTW

NOTE: 1/4 turn handle can be adjusted to any orientation. Notches on the valve stem reflect the three openings on the ball.

### 3-Way Diverting Ball Valves - L Flow

Female NPT x Female NPT x Female NPT

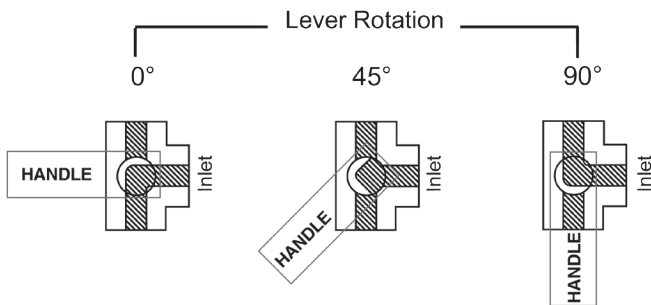

**Features**

- Can be used with gasoline and diesel fuel
- Blow-out proof stem
- Adjustable packing gland

**Specification**

- Pressure rating: **400 PSI CWP**

**Materials**

- Chromium-plated ball
- RPTFE seats and stuffing box ring
- Stainless steel handle and nut with vinyl sleeve

Size	Port	Bronze Part #
1/2"	full	BBV50TW <sup>1</sup>
3/4"	standard	BBV75TW
1"		BBV100TW

<sup>1</sup> Carbon steel handle and nut with vinyl sleeve

**Features**

- Blow-out proof stem
- Adjustable packing gland
- Locking handle

**Specification**

- Rated to **800 PSI CWP**

**Materials**

- Stainless steel ball
- RPTFE seats and stuffing box ring
- Stainless steel handle and nut with vinyl sleeve

**Approval**

- Meets NACE MR0175

Size	Port	Stainless Steel Part #
1/2"	full	SSBV50TW
3/4"	standard	SSBV75TW
1"		SSBV100TW



0